

PCT/IL2004/000069

29 FEB 2004

PA 2121710

# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

REC'D 08 MAR 2004

February 03, 2004

WIPO

PCT

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 10/350,288

FILING DATE: January 23, 2003

PRIORITY DOCUMENT  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)



By Authority of the

COMMISSIONER OF PATENTS AND TRADEMARKS

*H. L. Jackson*

H. L. JACKSON

Certifying Officer

01/23/03

31044 U.S. PRO

01-24-03

10350288 012303 X1

Express Mail Label No.

**UTILITY PATENT APPLICATION TRANSMITTAL  
(Small Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
368/03309Total Pages in this Submission  
45**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**HARD TISSUE SURFACE GEOMETRY DETERMINATION**

and invented by:

Uriel WEINSTEIN

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

**Application Elements**

1. ☐ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 27 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications (if applicable)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
  - d. ☐ Reference to Sequence Listing, a Table, or a Computer Program Listing Appendix
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (if filed)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

31002 U.S. PRO  
10/350288

# UTILITY PATENT APPLICATION TRANSMITTAL (Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.63(b))

Docket No.  
368/03309

Total Pages in this Submission  
45

## Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
  - a. ☒ Formal      Number of Sheets      11
  - b. ☐ Informal      Number of Sheets      \_\_\_\_\_
4. ☒ Oath or Declaration
  - a. ☐ Newly executed (original or copy)      ☒ Unexecuted
  - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
  - c. ☒ With Power of Attorney      ☐ Without Power of Attorney
  - d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ CD ROM or CD-R in duplicate, large table or Computer Program (Appendix)
7. ☐ Application Data Sheet (See 37 CFR 1.76)
8. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
  - a. ☐ Computer Readable Form (CFR)
  - b. ☐ Specification Sequence Listing on:
    - I. ☐ CD-ROM or CD-R (2 copies); or
    - II. ☐ Paper
  - c. ☐ Statement(s) Verifying Identical Paper and Computer Readable Copy

## Accompanying Application Parts

9. ☐ Assignment Papers (cover sheet & document(s))
10. ☐ 37 CFR 3.73(b) Statement (when there is an assignee)
11. ☐ English Translation Document (if applicable)
12. ☐ Information Disclosure Statement/PTO-1449      ☐ Copies of IDS Citations
13. ☐ Preliminary Amendment
14. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☒ Certificate of Mailing
  - ☐ First Class      ☒ Express Mail (Specify Label No.): EV168761653US

# UTILITY PATENT APPLICATION TRANSMITTAL (Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
368/03309

Total Pages in this Submission  
45

## Accompanying Application Parts (Continued)

17. Applicant claims small entity status. See 37 CFR 1.27.

☐ (Optional) Small Entity Statement(s) - Specify Number of Statements Submitted: \_\_\_\_\_

17. ☐ Additional Enclosures (please identify below):

## Request That Application Not Be Published Pursuant To 35 U.S.C. 122(b)(2)

18. ☐ Pursuant to 35 U.S.C. 122(b)(2), Applicant hereby requests that this patent application not be published pursuant to 35 U.S.C. 122(b)(1). Applicant hereby certifies that the invention disclosed in this application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication of applications 18 months after filing of the application.

### Warning

*An applicant who makes a request not to publish, but who subsequently files in a foreign country or under a multilateral international agreement specified in 35 U.S.C. 122(b)(2)(B)(i), must notify the Director of such filing not later than 45 days after the date of the filing of such foreign or international application. A failure of the applicant to provide such notice within the prescribed period shall result in the application being regarded as abandoned, unless it is shown to the satisfaction of the Director that the delay in submitting the notice was unintentional.*

# UTILITY PATENT APPLICATION TRANSMITTAL (Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
368/03309

Total Pages in this Submission  
45

## Fee Calculation and Transmittal

### CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	81	- 20 =	61	x \$9.00	\$549.00
Indep. Claims	4	- 3 =	1	x \$42.00	\$42.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$375.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$966.00

- ☐ A check in the amount of \_\_\_\_\_ to cover the filing fee is enclosed.
- ☐ The Commissioner is hereby authorized to charge and credit Deposit Account No. \_\_\_\_\_ as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
  - ☐ Credit any overpayment.
  - ☐ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
  - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: January 23, 2003

  
Signature  
Maier FENSTER, Reg. No. 41,016

William H. Dippert, Esq., Reed Smith LLP  
cc: 599 Lexington Avenue, 29th Floor  
New York, NY 10022-7650 Tel.: (212) 521-5400

10350288 .012303

Attorney Docket: 501010.20737  
Today's Date: January 23, 2003  
Serial No. To Be Assigned  
Filing Date: January 23, 2003, herewith  
For: HARD TISSUE SURFACE GEOMETRY DETERMINATION


---

EXPRESS MAIL CERTIFICATE

EXPRESS MAIL No.: EV 168961653 US

Deposited: January 23, 2003

I hereby certify that this correspondence is being deposited with the United States Postal Service Express mail under 37 CFR 1.10 on the date indicated above and is addressed to: Commissioner for Patents, Washington, D.C. 20231.

  
William H. Dippert  
Registration No. 26,723

368/03309

## HARD TISSUE SURFACE GEOMETRY DETERMINATION FIELD OF THE INVENTION

The present invention relates to the measurement of surface geometries, for example, of dental and bone tissues.

### BACKGROUND OF THE INVENTION

There are many applications where knowing the surface structure or internal structure of hard tissue is desirable. A typical solution, especially if the hard tissue is underlying soft tissue as is the case in dental care, is to obtain X-Ray CT images of the hard tissue

US patent 5,562,448 to Mushabac, the disclosure of which is incorporated herein by reference, describes an array of sensors which are slid over one or more teeth, to determine its surface structure. However, the position of the array must be determined for each measurement of the array. This patent also describes a point-by-point digitizing of jaw-bone surface by penetrating overlying soft tissue to the bone with a sharp probe, multiple times, again, requiring position determination for each point digitization. The multiple position determination may cause registration and/or other accuracy problems.

In dental tooth implantation other than by the method of US patent 5,562,448, it is common practice to peel the soft gum tissue off of the jaw bone, in order to better visualize the jaw bone surface geometry.

While common practice is to determine the drilling direction by feel, it has been suggested to mount a surgical stent (template) on the jaw bone, to guide the drilling. The stent may be manufactured, for example, using CAD/CAM techniques and based on CT images of the jaw.

US patent 5,163,940 to Bourque, the disclosure of which is incorporated herein by reference describes a measurement device for making a measurement of a joint portion.

### SUMMARY OF THE INVENTION

An aspect of some embodiments of the invention relates to apparatus for determining surface geometry of a hard tissue underlying soft tissue. In an exemplary embodiment of the invention, a plurality of pins or other tipped elements are advanced so that the tips penetrate the soft tissue and substantially do not penetrate, or penetrate by a known amount, the hard tissue. The surface may be reconstructed by knowing the relative positions of the tips. In an exemplary embodiment of the invention, the pins are coupled together so that their relative position, in at least one or two dimensions is known, for example, the pins each having a fixed channel along which substantially only motion along the axis of the pin is possible.

368/03309

In an exemplary embodiment of the invention, the apparatus is designed as a dental stent for simultaneous measurement of two sides and at least part of a top of a jaw bone where a tooth is to be implanted. In an exemplary embodiment of the invention, a drilling direction, position and/or depth in the jaw is estimated as a function of the determined surface geometry.

5      Optionally, the dental stent includes one or more locking pins to lock the stent to a jaw bone.

In an exemplary embodiment of the invention, the apparatus includes a built-in mechanism which determine the axial positions of the pins, and thus of the tips.

Optionally, the apparatus includes a pin advancer and/or retractor.

10      In an exemplary embodiment of the invention, the surface geometry is used as an input for a dental surgery planning system and/or drill guide. Alternatively or additionally, the surface geometry and/or tip position is used to control and/or monitor a drilling process. Optionally, the apparatus includes a drill guide whose orientation is controlled and/or monitored by the apparatus, responsive to the tip position.

15      There is thus provide din accordance with an exemplary embodiment of the invention, apparatus for measuring a surface geometry of hard tissue covered by a layer of soft tissue, comprising:

(a) a plurality of elements each having a tip adapted to penetrate said soft tissue and not substantially penetrate said hard tissue;

20      (b) a frame supporting movement of said elements, each along a path, such that a plurality of said tips, when positioned along the paths, define a surface; and

(c) at least one position sensor which generates a signal indicative of a tip position of at least one of said elements. Optionally, said path comprises a path along an axis of said elements.

25      Alternatively or additionally, said elements are elongate.

In an exemplary embodiment of the invention, said frame comprises two substantially oppositely facing panels, each of which panels supports a plurality of said elements. Optionally, said frame comprises at least one upper panel supporting a plurality of said elements. Alternatively or additionally, said frame comprises at least one upper panel supporting at least one fixed soft tissue penetration element. Alternatively or additionally, said tips are adapted to measure at least three sides of a shape generally corresponding to a rectangle, while mounted in said frame. Alternatively or additionally, said elements are arranged as a first set perpendicular to one plane, a second set generally facing said first plane and a third set oblique to said first and second sets.

30

368/03309

In an exemplary embodiment of the invention, at least some of said plurality of elements are arranged in two dimensions, with at least three elements in each of two orthogonal directions.

In an exemplary embodiment of the invention, said frame is adapted for disassembly.

5 In an exemplary embodiment of the invention, said plurality of elements comprises at least 10 elements. Optionally, said plurality of elements comprises at least 30 elements.

In an exemplary embodiment of the invention, the apparatus is sized and has a geometry adapted for a dental application of measuring a surface of a jaw bone based on axial positions of said tips.

10 In an exemplary embodiment of the invention, said hard tissue comprises cortical bone tissue.

Optionally, said tips have a density of at least one tip per nine square millimeters. Optionally, said tips have a density of at least one tip per square millimeter.

15 In an exemplary embodiment of the invention, said frame substantially allows only motion of each of said elements, along an axis of the element. Optionally, said frame is limited to non-axial motion to within a tolerance of less than 10% of a pitch of said elements. Optionally, said frame allows only axial motion of said elements, within a tolerance of less than 5% of a pitch of said elements to non-axial motion of said tips.

20 In an exemplary embodiment of the invention, said tips are made sharp enough to penetrate soft tissue but not so sharp that they penetrate cortical bone under an application force of under 50 grams.

In an exemplary embodiment of the invention, said tips include a bone stop which prevents entry of the elements into bone tissue past said a predetermined distance.

25 Optionally, said at least one encoder comprises a single encoder common to multiple elements. Optionally, said at least one encoder comprises an imaging encoder.

Alternatively, said at least one encoder comprises at least one encoder per element. Optionally, said at least one encoder comprises an optical encoder reading a position marking off of an element. Alternatively or additionally, said at least one encoder comprises a magnetic encoder reading a position marking off of an element. Alternatively or additionally, said at  
30 least one encoder comprises a resistance encoder reading a resistance of an element. Alternatively or additionally, said at least one encoder comprises a capacitance encoder reading a capacitance of an element. Alternatively or additionally, said at least one encoder comprises a force encoder reading a compression of a spring attached to an element.

368/03309

In an exemplary embodiment of the invention, said at least one encoder has a precision of better than 0.5 mm. Optionally, said at least one encoder has a precision of better than 0.2 mm.

5 In an exemplary embodiment of the invention, said at least one encoder is integral to said frame.

In an exemplary embodiment of the invention, said at least one encoder is separate from said frame. Optionally, the apparatus comprises a holder for at least part of said frame in which said at least one encoder is integrated.

10 In an exemplary embodiment of the invention, the apparatus comprises an element advance mechanism operative to simultaneously advance a plurality of said elements through said soft tissue at a same time. Optionally, said element advance mechanism is adapted to apply a force limited to prevent inadvertent penetration of said hard tissue. Alternatively or additionally, said element advance mechanism comprises a pneumatic advance mechanism. Optionally, the apparatus comprises a pneumatic channel for each of said elements. Optionally,  
15 said advance mechanism is operable as an element retractor.

In an exemplary embodiment of the invention, the apparatus comprises at least one position lock for at least one of said elements. Optionally, said position lock comprises a friction lock defined by a panel perpendicular to an axial motion direction of said elements.

20 In an exemplary embodiment of the invention, the apparatus comprises a source of adhesive adapted to provide adhesive to lock said elements to said frame.

In an exemplary embodiment of the invention, the apparatus comprises at least one support adapted to lock said frame relative to at least one of said soft tissue and said hard tissue.

25 In an exemplary embodiment of the invention, the apparatus comprises a drill guide. Optionally, said drill guide is adapted to guide a standard dental drill bit. Optionally, said drill guide is adapted to limit a depth of penetration of said drill bit. Alternatively or additionally, said drill guide is locked to said frame. Optionally, said drill guide is adjustable in at least two degrees of freedom of position and orientation prior to being locked to said frame. Optionally, said drill guide is adjustable in at least three degrees of freedom of position and orientation  
30 prior to being locked to said frame. Alternatively or additionally, the apparatus comprises at least one encoder adapted to measure at least one of said degrees of freedom.

In an exemplary embodiment of the invention, said drill guide comprises at least one penetration limitation sleeve having a selectable offset from said frame. Optionally, said at

368/03309

least one penetration limitation sleeve comprises a plurality of sleeves each having a different offset.

In an exemplary embodiment of the invention, said encoder comprises a data output. Optionally, said data output is wireless. Alternatively or additionally, the apparatus comprises  
5 a three-dimensional display system to which said data output is attached, which display system is adapted to display an indication of said surface. Optionally, said display system overlays said surface on a three dimensional representation of said hard tissue. Alternatively or additionally, the apparatus comprises a controller configured to register said surface to said representation. Alternatively or additionally, said display system generates alerts responsive to  
10 an undesirable spatial position of a tool relative to said surface. Alternatively or additionally, said display system generates an indication of at least one of a position and orientation of a drill guide mounted on said frame. Optionally, said indication comprises indication of a projected drill bore.

In an exemplary embodiment of the invention, the apparatus comprises a computerized  
15 manufacturing system to which said data output is attached, for manufacture of a drill guide for said hard tissue.

In an exemplary embodiment of the invention, the apparatus comprises a plurality of elements having tips adapted to not penetrate soft tissue.

There is also provided in accordance with an exemplary embodiment of the invention,  
20 a method of measuring the surface of a hard tissue underlying a soft tissue, comprising:

(a) inserting a plurality of different sharp elements through said soft tissue to a surface of said hard tissue;

(b) determining at least relative positions of tips of said sharp elements; and

(c) reconstructing a map of said surface of said hard tissue from said at least relative  
25 positions. Optionally, the method comprises using said map to guide a drill to said hard tissue. Optionally, the method comprises providing a drill guide for using said map. Optionally, said hard tissue comprises a jaw bone and wherein said soft tissue comprises hard tissue.

In an exemplary embodiment of the invention, the method comprises selecting an offset sleeve for controlling a depth of said drilling. Alternatively or additionally, the method  
30 comprises adjusting said drill guide according to said map.

In an exemplary embodiment of the invention, said elements are mounted on two opposing panels of a frame and comprising approximating said panels. Alternatively or additionally, the method comprises registering said map to a previously acquired radiological

368/03309

image of said hard tissue. Alternatively or additionally, the method comprises providing real-time feedback on at least one of a position and orientation of said drill guide.

In an exemplary embodiment of the invention, inserting comprises inserting using a standard dental pneumatic source. Alternatively or additionally, the method comprises removing said elements using a standard dental pneumatic source.

In an exemplary embodiment of the invention, the method comprises removing said elements from said soft tissue prior to said determining. Alternatively, the method comprises removing said elements from said soft tissue after said determining.

In an exemplary embodiment of the invention, the method comprises locking said elements prior to said determining. Alternatively, not locking said elements prior to said determining.

There is also provided in accordance with an exemplary embodiment of the invention, a dental surgical stent, comprising:

- (a) an active stent portion adapted to fit over a portion of a jaw bone; and
- (b) at least one visual indicator showing an activation state of said stent.

There is also provided in accordance with an exemplary embodiment of the invention, a dental surgical stent, comprising:

- (a) a surgical stent portion adapted for mounting on a jaw; and
- (b) a drill guide including at least one encoder which generates a signal indicative of at least one of a position and orientation of the drill guide. Optionally, said surgical stent is machined for a particular jaw. Alternatively or additionally, said surgical stent comprises at least one mounting point for said drill guide.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Non-limiting embodiments of the invention will be described with reference to the following description of exemplary embodiments, in conjunction with the figures. The figures are generally not shown to scale and any measurements are only meant to be exemplary and not necessarily limiting. In the figures, identical structures, elements or parts which appear in more than one figure are preferably labeled with a same or similar number in all the figures in which they appear, in which:

Figs. 1A and 1B are schematic isometric and a cross-sectional illustration of a jaw bone, showing the various layers thereof;

Fig. 2 is a schematic illustration of a stent in accordance with an exemplary embodiment of the invention;

368/03309

Fig. 3 is a schematic cross-sectional illustration of a mounted stent of Fig. 2;

Fig. 4A is a schematic cross-section of a stent as in Fig. 2, showing the operation of a single pin, in accordance with an exemplary embodiment of the invention;

Fig. 4B is a schematic view of a single pin for the stent of Fig. 2;

5 Fig. 4C is a top view of a part of a panel, showing the arrangement of a plurality of pins and their encoding circuitry, in accordance with an exemplary embodiment of the invention;

Figs. 5A-5D are schematic illustrations of a stent including a drill guide, in accordance with an exemplary embodiment of the invention;

10 Fig. 6 is a schematic diagram showing a complete dental system including a stent, in accordance with an exemplary embodiment of the invention;

Figs. 7A and 7B are flowcharts of the process of using a dental system as in Fig. 6, in accordance with an exemplary embodiment of the invention;

Figs. 8A-8B show variations of pin mechanisms, in accordance with exemplary embodiments of the invention;

15 Fig. 8C shows a multi-tooth stent, in accordance with exemplary embodiments of the invention;

Fig. 9 is a schematic illustration of a stent designed for disassembly, in accordance with an exemplary embodiment of the invention; and

Fig. 10 is a schematic illustration of an exemplary stent reader for the stent of Fig. 9.

## 20 DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

### Overview of Tooth Implant Problem

Figs. 1A and 1B are a schematic isometric and a cross-sectional (along plane I-B of fig. 1A) illustration of a jaw 100, showing the various layers thereof. A plurality of teeth 102 are embedded in a jaw-bone 104. A layer of soft gum tissue 106 overlays bone 104. If a tooth is missing, for example as in a space 108, the jaw bone may resorb, making later implantation difficult or impossible, in addition, there are esthetic considerations and a danger (if for example a bridge is not provided), that teeth might migrate into space 108. Thus, it is often desirable to implant new teeth instead of the missing teeth. While a tooth may be mounted using a bridge to nearby teeth, it may be desirable for a number of reasons that the tooth be anchored in jawbone 104. A typical procedure is to drill a bore 110 in jaw bone 104 and mount a tooth implant in bore 110. Two main dangers with the drilling are (a) the bore might be too close to the sides of jaw bone 104 (the cortical layer); and (b) the bore might reach to the mandibular nerve 112. In addition, a certain orientation, for mechanical, crown design and/or esthetic reasons is often desirable, so the bore orientation should generally be within certain

368/03309

parameters. These considerations also apply to the upper jaw, in which additional dangers of incorrect placement include causing chronic sinus problems or even penetrating the brain.

It should be noted that once a tooth is lost, the jaw-bone resorbs, typically within 6 months, so a completely new bore must be drilled. Interpretation of CT images, selecting a bore direction and, especially, actually drilling in a correct direction, require considerable expertise, not acquired by most dentists.

#### Exemplary Stent Embodiment

Fig. 2 is a schematic illustration of a stent 200 in accordance with an exemplary embodiment of the invention, in which stent 200 is used to determine the surface geometry of the jawbone underlying space 108. Fig. 1B shows a desired bore direction, which may be determined, for example as a tradeoff between a bore direction aligned with a chewing direction and a bore direction in which the jaw bone is less likely to fracture under the stress of implantation and chewing. Generally, a bore that is centered in the jaw bone is desirable.

In an exemplary embodiment of the invention, stent 200 comprises one or more side panels 202 and 204 which are presented to a side of space 108. A plurality of sharp-tipped pins 206 are advanced from panel 202 so that they pierce soft tissue 106 and contact bone 104. The pin tips are designed to not enter bone or to enter it to a substantially small and/or measured amount. Thus, determining the relative positions of the tips of pins 206 can assist in determining the 3D surface geometry of bone 104. Optionally, a drill guide 208 is provided on stent 200. In one embodiment, drill guide 208 is controlled and/or monitored by stent 200, for example to ensure a desired bore angle is provided. In another embodiment, drill guide 208 is fabricated or adjusted based on signals received from stent 200 to indicate the bone geometry and drill guide 208 is mounted on stent 200, which remains on space 108. The pins may be advanced, for example, individually and/or as one or more groups, for example as described below.

In an exemplary embodiment of the invention, stent 200 includes one or more LED or other operating light 207 or display to indicate that the stent is active and/or its operational state.

In an exemplary embodiment of the invention, two panels 202 and 204 are used, so that jaw 100 is can be rigidly engaged by stent 200 and measurements made of both sides of the jaw bone. Optionally, one or more locking screws 209 (Fig. 3) may be provided to engage the gum (non-penetrating screws or pins) or teeth (e.g., blunt screws) or jaw bone (e.g. sharp screws). Alternative designs, for example as described below, may be used instead.

368/03309

Fig. 3 is a schematic cross-sectional illustration of a mounted stent 200, ignoring the drill guide. The pins 206 are shown penetrating soft tissue 106 and contacting bone 104. As the bone geometry is uneven, so is the penetration depth. In an exemplary embodiment of the invention, the tips define the surface and, if two panels are used, two sides of the bone are defined, as is the bone thickness (which varies, e.g., by the distance between the bone surfaces). As shown, each pin 206 has its own channel 318 in which it can axially advance or retract. All these channels are coupled via panel 202, providing a common reference for all the pins. Optionally, one or more inclined channels (not shown) are provided, for mapping of the upper part of bone 104, for example to determine how far the original tooth socket is resorbed and the bone restructured. Alternatively or additionally, a top panel 305 with advancing pins 307 is provided for this purpose. Optionally (as shown), pins 307 are fixed in place, and are used, for example, to provide a known distance between the stent and the jaw bone from its top.

A housing 310 of stent 200 encloses the pins area and may be used, for example, for providing pressurized air for advancing and/or retracting of the pins. A channel (not shown) may be used to pass air pressure from one panel of the stent to the other. Alternatively or additionally, glue may be flowed into housing 310 (e.g., from an aperture not shown, using a syringe, for example) to lock the pins in place.

#### Operation of Measurement Element

Fig. 4A is a schematic cross-sectional illustration of a stent 200, showing the operation of a single pin 402, in accordance with an exemplary embodiment of the invention. Fig. 4B is a schematic illustration of pin 402, outside of a channel thereof 404. Pin 402 includes a tip 406, which is optionally sharp enough to penetrate soft tissue 106 without causing excessive pain and/or damage, while not being sharp enough to penetrate bone 104. Alternatively or additionally, tip 406 is otherwise adapted for preventing inadvertent bone penetration, for example, by providing one or more optional penetration stops (shown), or by shaping of the tip, such providing a stepped incline of tip 406, in some or all angular directions.

In an exemplary embodiment of the invention, the tip 406 is designed to work correctly and not penetrate bone under certain conditions, for example, under application of certain forces, such as smaller than 100, 50, 20 or 10 grams.

In an exemplary embodiment of the invention, an optical encoder 408 reads the relative and/or absolute position of pin 402, for example by detecting, using a detector 414, reflections of a LED source 410 from engraved or painted lines 412 of pin 402. Other marking methods may be used as well. Optionally, a pinhole aperture 409 is used to improve the detection.

368/03309

Alternatively, other methods and apparatus for determining the pin position, absolute and/or relative, optical and/or mechanical, can be used, for example as known in the art of translation detection and/or encoding. The precision of axial position determining can be, for example better than 1 mm, 0.5 mm or 0.2 mm, for example to within or better than the radiological image.

In an exemplary embodiment of the invention, pin 402 is advanced by pressing against a base 416 thereof, for example using air pressure. Referring also to Fig. 3, the plurality of pin channels 318 are interconnected to an optional volume 312 which is enclosed by housing 310. In an exemplary embodiment of the invention, air pressure is provided by an input vent 314. Any air that leaks around pins exits through an exit vent 316. Optionally, the operation of vents 314 and 316 can be exchanged, for example, by attaching a source to vent 316 and allowing 314 to be an exit vent. This exchanged operation is optionally used to retract pins 206.

In an exemplary embodiment of the invention, once pin 402 contacts jaw bone 104 it is locked in place, for example by shifting an apertured plate 430 in the plane the panel, so that the pins are frictionally engaged between plate 430 and channel 404. Alternatively or additionally, a ratchet mechanism is provided for each pin which allows only forward motion of the pin. Optionally, apertured plate 430 comprises inclined tabs (not shown) in its apertures which preferentially allows motion in one direction. Optionally, moving plate 430 releases the ratchet. Alternatively, other methods and apparatus for locking pins in place may be used, for example as known in the art of locking. As will be noted below, for example, locking is not necessary in all embodiments of the invention.

In an exemplary embodiment of the invention, panel 202 (of which the figure shows only a small part) is formed of layers, a rigid channel layer 420, which guides pins 402, an optional PCB layer 422 on which the encoder is mounted and which provides data and power lines to the encoders and apertured locking plate 430 between the two layers. Mounting methods for electronics other than using a PCB, for example integrated optics, may be used instead.

Fig. 4C is a cross-sectional view of a panel through line I-C on Fig. 4A, showing the arrangement of a plurality of pins and their encoding circuitry. In the exemplary embodiment shown, the pins are arranged in an array, with each pin having its own encoder. For example, each panel may include between 10 and 30 pins, arranged in a generally rectangular array. In an exemplary embodiment of the invention, each panel has 25 pins in a hexagonal arrangement. However, other arrangements, such as rectangular may be used. Also, smaller

368/03309

(e.g., 4) or greater (e.g., 30) numbers of pins per panel may be provided. An exemplary pitch is 2 mm between pins. Non-axial motion of the pins is desirably insubstantial, for example, limited to less than 10% or 5% of the pitch of the pins. It should be noted that in some embodiments of the invention, curved pins are used instead of straight pins.

5 In an exemplary embodiment of the invention, the stent dimensions are as follows: each panel has an active width (of pins, along the direction of the jaw) of between 5 and 12 mm. Each panel has an active height of 8-22 mm, for example 10 mm. The distance between the panels is for example, between 8 and 22 mm.

#### Design Details and Drill Guide

10 Fig. 5A is an exploded view of a stent 500 including a panel section 502, a panel section 504 and a drill guide section 506, in accordance with an exemplary embodiment of the invention. As shown, stent 500 comprises two locking plugs 508 and 509 which lock the panels to a drill guide base tube 510. Optionally, for example as described below, panel 502 may slide and lock at a variable and/or controllable distance from panel 504.

15 In an exemplary embodiment of the invention, plug 508 comprises electronics, for example for reading the encoders and/or for a wireless transmission link, such as BlueTooth. A battery or data and power cable are optionally included in plug 508, as needed. Optionally, plug 509 includes a pneumatic vent for attaching a standard dental air/water syringe for moving the pins, as described above. A semi-locked state (in which the pins do not move and substantially amount) is optionally achieved by maintaining the pneumatic pressure after pin  
20 insertion.

In an exemplary embodiment of the invention, drill guide 506 includes optical (or other) encoders to indicate the position and/or orientation of drill guide 506 and also optionally includes a locking mechanism (described below) for preventing motion of drill guide 506 once  
25 adjusted.

In an exemplary embodiment of the invention, drill guide 506 comprises a capsule 512, shown in top-cross-sectional view in Fig. 5B, which is positioned and oriented in base tube 510. In the design shown, three degrees of freedom are provided, axial motion along tube 510, and two degrees of rotation, namely rotation parallel to the axis or perpendicular to the axis of  
30 tube 510. Fewer or greater number of degrees of freedom can be provided instead. Two degrees of freedom are provided by capsule 512 sliding or rotating in tube 510. A third degree of freedom is provided by rotation of a sleeve 514 inside capsule 512. A locking screw and nut 516 and 518, and tab 520, are optionally used to lock the position and/or orientation of guide 506. Penetration depth into jaw bone is optionally set by selecting a suitable penetration stop

368/03309

522. This depth is optionally measured on a CT image or by measuring an X-ray image. Alternatively or additionally, to selecting a stop 522 from a set of stops, stop 522 may be threaded to allow selectable depth by rotation. Alternatively or additionally, a telescopic stop 522 is used. Optionally, multiple stops 522 with different diameters are provided, for example, to set different penetration depth for different stages of drilling with different diameter drill bits.

In an exemplary embodiment of the invention, drill guide 506 includes three position encoders 524, 526 and 528 which may be all mounted on capsule 512 and connected by a cable 523 to other electronic components of stent 500. In an exemplary embodiment of the invention, encoder 524 reads horizontal markings 532 on the inside of tube 510; encoder 526 reads vertical markings 534 (shown dotted) on the inside of tube 510 and encoder 528 reads horizontal markings 536 on the outside of sleeve 514. Other encoder and marking configurations (or a mechanical or other type of encoder as known in the art) may be used instead. Optionally a cable 523 connects the encoders to electronics in stop 508 (or in another location).

Fig. 5C shows another exploded view of stent 500 with some optional variations. The pin assemblies are shown as three packaged modules, a pneumatic package 542 (and 552), an optional apertured plate 430 and an electronic package 544 (and 554). In an exemplary embodiment of the invention, each package has an input vent 546 (and 556) and an output vent 548 (and 558). In the embodiment shown, a pair of tubes 562 and 564 are provided on base tube 510 to pass air pressure from one side of the stent to the other, with each tube connecting either the input or the output vents. Also shown are tube couplers 566 and 568 on the stops. Matching couplers, not shown are provided on the far side of the stops. Electronic wiring can, for example, pass in these tubes, or be printed or pasted on the inside or outside of tube 510. The electronic blocks 544 and 554 optionally include a multiplexer or data encoder of some type, to reduce the number of data lines needed. Optionally, manual switches 547 are provided for manual movement, locking and/or releasing of apertured plates 430. These switches may be, for example, self locking.

In an exemplary embodiment of the invention, panel 502 slides along tube 510 relative to panel 504. Optionally, a screw (not shown) is provided to set the distance between the panels. Alternatively or additionally, a sliding lock is used based on a close fit between a wing 560 and a slot cut in tube 510. If a force applied to panel 502 is not exactly parallel to the axis of tube 510, panel 502 rotates and wing 560 binds against tube 510. Optionally a position encoder (not shown) is provided, for example on capsule 512 or in stop 509, to read the panel

368/03309

position, for example by reading markings 561 of wing 560. In an alternative embodiment, no encoder is provided and the surface mapped by each panel is separately matched to a CT image. Optionally, this matching takes into account the type of offset allowed between the two panels.

5 In an exemplary embodiment of the invention, stent 500 is disposable. Alternatively it is sterilized between uses. Optionally, the division of the panels into packages allows easier sterilization. Alternatively or additionally, the electronics package, which may be more sensitive to sterilization is manufactured under very sterile conditions and/or sterilized using gas. This may reduce the cost of manufacturing.

10 Fig. 5D is a cross-sectional view of stop 509 showing a pneumatic sub-system thereof. In an exemplary embodiment of the invention, a vent 570 is provided through which pressured air can be provided to a supply tube 572, for moving the pins. By rotating a housing section 582, an exit 576 of supply tube 572 is selectively attached to a first vent supply tube 578, attached to vents 558 and 548 or to a second vent supply tube 580 attached to vents 546 and  
15 556. When supply tube 572 is not coupled to the vent supply tube, it optionally is open to the ambient air, to release pressure. A valve 574 is optionally provided to prevent pressure release through vent 570. Other pressure supply mechanism can be used as well, for example, different tube selection mechanisms or using a separate vent 570 for each operation of advancing and retracting the pins.

20 Other designs for a drill guide may be used as well, for example ones in which the degrees of freedom are provided by a unitary mechanism, rather than one mechanism for each degree of freedom.

#### System and Usage

Fig. 6 is a schematic diagram showing a complete oral measurement system 600  
25 including a stent 200, in accordance with an exemplary embodiment of the invention.

Stent 200 optionally includes a pneumatic pin advancing mechanism which is optionally powered by connection to a standard air pressure source 602. An RF data link 604 connects stent 200 to a controller 606 which receives information from the encoders. Alternatively or additionally, a cable connection is provided for the data and/or power.  
30 Optionally controller 606 is provided within the stent and connects directly to a standard or propriety interface on an external computer and/or provides on-stent indications for drilling directions. Alternatively, controller 606 is incorporated with or is attached to a computer 608, including a display 610 and a user input 612, which may be used for presenting surface geometry and/or for planning paths. Optionally, controller 606 and/or computer 608 is attached

368/03309

to one or more positioning sensors 614, for example of a type well known in the art, and adapted to attach to a drill 616 or the jaw. Such positioning sensors may be used to overlay the path of a dental tool on the 3D geometry and/or on a 3D or 2D radiological image shown on display 610, for example using methods well known in the art.

5 Fig. 7A is a flowchart 700 of the process of using a measurement system as in Fig. 6, in accordance with an exemplary embodiment of the invention.

At 702, a space 108 for implanting a tooth is identified and a suitably sized stent 200 is selected. In an exemplary embodiment of the invention, a relatively narrow stent is used and the implantation location position along the jaw is used to select the stent position, especially  
10 if the drill guide of the stent has no freedom of motion along the jaw. In some embodiments of the invention, a multiple drill-guide stent which optionally includes a template for drilling multiple holes, is provided.

At 704, the stent is optionally affixed to jaw 100, for example by advancing one or more blunt or sharp pins or screws. Alternatively, the advancing of pins 206 is used for locking  
15 to the jaw.

At 706, pins 206 are advanced, for example manually or using a pneumatic advancer.

At 708, the pins are optionally locked in place, for example mechanically or by gluing. It should be noted that in some embodiments of the invention, the pin position is only measured once and all the pin positions are sampled in parallel, so no actual locking is  
20 required. Optionally, air pressure is used to keep the pins advanced to the bone.

At 710, the pin axial positions are read using the encoders and position data is optionally transferred to controller 606. Alternatively, for example as described in Figs. 9 and 10, stent 200 is at least partially disassembled and read when it is off of jaw 100.

At 712, the bone geometry is optionally displayed on display 610 and a bore path and/or path limits are selected. Alternatively, for example as described in Fig. 7B, registration to a radiological image is carried out.  
25

At 714, a drill guide is adjusted or fabricated (e.g., using an attached CAD/CAM system) to match these limitations. In an exemplary embodiment of the invention, the drill guide is manually adjusted until the encoders 524-528 show the desired values on display 610.  
30 Alternatively or additionally, a micro-motor set on stent 200 or in a separate jig are used to adjust the drill guide.

At 716, the drill guide is mounted on stent 200 (or it may be pre-mounted as shown above) and drilling is started. Optionally, a receptacle for the drill guide is provided on stent 200.

368/03309

At 718, the drilling process is optionally monitored, for example by generating an audio or visual indication if the drill guide is outside of allowed parameters. Alternatively or additionally, the process is automatically stopped, for example using a power cut-off to the drill.

5 At 720, the stent is removed. Optionally, the pins are retracted or allowed to retract (e.g., having spring retraction), prior to stent removal. Alternatively or additionally, the two panel of the stent are pushed apart using a screw, so that the pins are forcefully retracted. Alternatively or additionally, the panels are removed from stent 200. Alternatively or additionally, the stent includes a break line to be broken for removal.

10 Then, implantation can proceed using the drilled holes methods known in the art.

In an alternative embodiment of the invention, the drill guide (optionally with position/orientation encoders) is used on a different, standard, stent, for example, by providing a socket for it on a CAD/CAM manufactured surgical stent. Optionally, the surgical stent is manufactured with oversized drill guiding bores, if any, to allow some freedom of selecting the  
15 bore using a drill guide according to the present invention.

In another alternative embodiment, the stent of the present invention is used in a procedure where gum tissue is peeled off, so the pins do necessarily need to be designed to differentially penetrate hard tissue and soft tissue.

#### Stent Variations

20 Figs. 8A-8B show variations of pin mechanisms, in accordance with exemplary embodiments of the invention. In Fig. 8A, a non-optical position encoder 802 is used to read a position of pin 402. In one example, a resistive encoder is used, for example, if pin 402 is resistive. In another example, capacitance between encoder 802 and pin 402 is measured, using methods known in the art. In another example, encoder 802 senses a magnetic field put out by  
25 pin 402 and/or by markings (e.g., magnetic encoding) 804 thereon.

Fig. 8B shows an embodiment in which a spring 810 is used to advance or retract pin 402 (e.g., depending on the spring type). Air pressure may be used to maintain the spring in a compressed or stretched configurations. Pin position is determined, for example, by reading a pressure or strain sensor 812 coupled to spring 810. As noted above, locking of the pins may  
30 not be required, for example if the measurement time is short. In an alternative embodiment, a single encoder reads multiple pins, for example an imaging encoder can image the markings on multiple pins simultaneously.

368/03309

In an exemplary embodiment of the invention, the pins are read in parallel. A multiplexer is optionally provided to place the signals on a relatively small number of data lines. Alternatively, the pins may be read in series.

Fig. 8C shows a multi-tooth stent 840, in accordance with exemplary embodiments of the invention. When multiple teeth are to be implanted, often two or more holes are drilled and screws implanted. A rail may be attached to the screws and a multiple-tooth implant mounted on the rail. Stent 840 includes, for example, two stent portions 842 and 844, for example as described above, with a rigid or flexible attachment 846 (depending on the accuracy desired). Optional, an encoder 848 is provided for determining the distance between the stent portions. The electronics may all be provided on one of the stent portions. Optionally (not shown), one or both drill guides are movable (e.g., mounted on a rail, with optional position encoders) along the line connecting the two stent portions, for selecting of drill location. In an exemplary embodiment of the invention, such encoder input may be used to assist the surface matching (described below) by providing a starting point.

In general, if a stent is not mounted in a correction location, it may be removed and re-inserted. Alternatively, the stent may be wide enough to allow movement of the drill guide. In any case, by viewing the CT image, it can be seen if the current bore direction clashes with existing roots or otherwise is unsuitable.

#### Registration variations

Fig 7B is a flowchart 750 of a process for registering stent 200 to a previously acquired CT image.

At 752, a CT image (or other 3D radiological image) of the jaw is acquired.

At 754, a stent 200 is attached, as described above.

At 756, the surface data received from stent 200 is matched to a surface contour on the CT image, so that the stent and CT image are registered. Various matching methods can be used, for example using a segmentation algorithm to determine the surface contours on the CT image and then doing a maximum likelihood match for the two contours. Optionally the user indicates an initial approximate registration point. Other matching methods, for example based on correlation or landmarks, may be used.

At 758, drill paths are optionally marked on the display and registered to the stent and various drill path selection methods may be applied.

At 760, the display is optionally updated in real time, for example showing device positions based on a position sensor and/or showing drill path based on input from the stent encoders 524-528.

368/03309

Disassembled Stent

Fig. 9 is a schematic illustration of a stent 900 designed for disassembly, in accordance with an exemplary embodiment of the invention. Stent 900 comprises a stent body 901 having two panel portions 902 and 904, each defining a receptacle for a pin package 906 and 908.

5 Pneumatic couplers (not shown) are optionally provided on the tops of the pin packages.

During usage, the pins are advanced and the locked in place. The pin packages are then removed and read using an external reader 1000, as shown for example in Fig. 10. In an exemplary embodiment of the invention, reader 1000 includes (inside a receptacle 1002 thereof) a plurality of position encoders (or one or more array imagers) which detect the tip  
10 location. Alternatively, the whole stent is mounted on such an external reader. Alternatively, the backs of pin packages 906 and 908 are opened and the bases of the pins read. Alternatively or additionally, reader 1000 includes electronics for reading and/or powering encoders provided in the packages.

In an exemplary embodiment of the invention, the pins are spring loaded to advance  
15 and are forced towards the bone until they are pushed back from the bone. Glue or another other locking mechanism is used to lock the pins in place. In an exemplary embodiment of the invention, the pin-packages are pre-filled with a glue that sets shortly after the package is exposed to ambient air.

Optionally, one or more fixed pins 910 is provided for locking stent 900 to the jaw, by  
20 advancing panels 902 and 904 towards each other.

It will be appreciated that the above described methods of bone surface measurement may be varied in many ways, including, changing the order of steps and the types of tools used. In addition, a multiplicity of various features, both of method and of devices have been described. In some embodiments mainly methods are described, however, also apparatus  
25 adapted for performing the methods are considered to be within the scope of the invention. It should be appreciated that different features may be combined in different ways. In particular, not all the features shown above in a particular embodiment are necessary in every similar embodiment of the invention. Further, combinations of the above features are also considered to be within the scope of some embodiments of the invention. Also within the scope of the  
30 invention are surgical kits which include sets of medical devices suitable for performing a single or a small number of measurements. Also, within the scope is software and computer readable-media including such software which is used for carrying out and/or guiding the steps described herein, such as surface matching and bore selection. When used in the following claims, the terms "comprises", "includes", "have " and their conjugates mean "including but

368/03309

not limited to".

It will be appreciated by a person skilled in the art that the present invention is not limited by what has thus far been described. Rather, the scope of the present invention is limited only by the following claims.

368/03309

## CLAIMS

1. Apparatus for measuring a surface geometry of hard tissue covered by a layer of soft tissue, comprising:
  - 5 (a) a plurality of elements each having a tip adapted to penetrate said soft tissue and not substantially penetrate said hard tissue;
  - (b) a frame supporting movement of said elements, each along a path, such that a plurality of said tips, when positioned along the paths, define a surface; and
  - (c) at least one position sensor which generates a signal indicative of a tip position of at  
10 least one of said elements.
2. Apparatus according to claim 1, wherein said path comprises a path along an axis of said elements.
- 15 3. Apparatus according to claim 1, wherein said elements are elongate.
4. Apparatus according to claim 1, wherein said frame comprises two substantially oppositely facing panels, each of which panels supports a plurality of said elements.
- 20 5. Apparatus according to claim 4, wherein said frame comprises at least one upper panel supporting a plurality of said elements.
6. Apparatus according to claim 4, wherein said frame comprises at least one upper panel supporting at least one fixed soft tissue penetration element.  
25
7. Apparatus according to claim 4, wherein said tips are adapted to measure at least three sides of a shape generally corresponding to a rectangle, while mounted in said frame.
8. Apparatus according to claim 4, wherein said elements are arranged as a first set  
30 perpendicular to one plane, a second set generally facing said first plane and a third set oblique to said first and second sets.
9. Apparatus according to claim 1, wherein at least some of said plurality of elements are arranged in two dimensions, with at least three elements in each of two orthogonal directions.

368/03309

10. Apparatus according to claim 1, wherein said frame is adapted for disassembly.
11. Apparatus according to claim 1, wherein said plurality of elements comprises at least  
5 10 elements.
12. Apparatus according to claim 1, wherein said plurality of elements comprises at least  
30 elements.
- 10 13. Apparatus according to claim 1, sized and having a geometry adapted for a dental  
application of measuring a surface of a jaw bone based on axial positions of said tips.
14. Apparatus according to claim 1, wherein said hard tissue comprises cortical bone  
tissue.
- 15 15. Apparatus according to claim 1, wherein said tips have a density of at least one tip per  
nine square millimeters.
16. Apparatus according to claim 1, wherein said tips have a density of at least one tip per  
20 square millimeter.
17. Apparatus according to claim 1, wherein said frame substantially allows only motion of  
each of said elements, along an axis of the element.
- 25 18. Apparatus according to claim 17, wherein said frame is limited to non-axial motion to  
within a tolerance of less than 10% of a pitch of said elements.
19. Apparatus according to claim 18, wherein said frame allows only axial motion of said  
elements, within a tolerance of less than 5% of a pitch of said elements to non-axial motion of  
30 said tips.
20. Apparatus according to claim 1, wherein said tips are made sharp enough to penetrate  
soft tissue but not so sharp that they penetrate cortical bone under an application force of under  
50 grams.

368/03309

21. Apparatus according to claim 1, wherein said tips include a bone stop which prevents entry of the elements into bone tissue past said a predetermined distance.
- 5 22. Apparatus according to claim 1, wherein said at least one encoder comprises a single encoder common to multiple elements.
23. Apparatus according to claim 22, wherein said at least one encoder comprises an imaging encoder.
- 10 24. Apparatus according to claim 1, wherein said at least one encoder comprises at least one encoder per element.
25. Apparatus according to claim 24, wherein said at least one encoder comprises an optical encoder reading a position marking off of an element.
- 15 26. Apparatus according to claim 24, wherein said at least one encoder comprises a magnetic encoder reading a position marking off of an element.
- 20 27. Apparatus according to claim 24, wherein said at least one encoder comprises a resistance encoder reading a resistance of an element.
28. Apparatus according to claim 24, wherein said at least one encoder comprises a capacitance encoder reading a capacitance of an element.
- 25 29. Apparatus according to claim 24, wherein said at least one encoder comprises a force encoder reading a compression of a spring attached to an element.
- 30 30. Apparatus according to claim 1, wherein said at least one encoder has a precision of better than 0.5 mm.
31. Apparatus according to claim 1, wherein said at least one encoder has a precision of better than 0.2 mm.

368/03309

32. Apparatus according to claim 1, wherein said at least one encoder is integral to said frame.
- 5 33. Apparatus according to claim 1, wherein said at least one encoder is separate from said frame.
34. Apparatus according to claim 33, comprising a holder for at least part of said frame in which said at least one encoder is integrated.
- 10 35. Apparatus according to claim 1, comprising an element advance mechanism operative to simultaneously advance a plurality of said elements through said soft tissue at a same time.
36. Apparatus according to claim 35, wherein said element advance mechanism is adapted to apply a force limited to prevent inadvertent penetration of said hard tissue.
- 15 37. Apparatus according to claim 35, wherein said element advance mechanism comprises a pneumatic advance mechanism.
- 20 38. Apparatus according to claim 37, comprising a pneumatic channel for each of said elements.
39. Apparatus according to claim 37, wherein said advance mechanism is operable as an element retractor.
- 25 40. Apparatus according claim 1, comprising at least one position lock for at least one of said elements.
41. Apparatus according to claim 40, wherein said position lock comprises a friction lock defined by a panel perpendicular to an axial motion direction of said elements.
- 30 42. Apparatus according to claim 1, comprising a source of adhesive adapted to provide adhesive to lock said elements to said frame.

368/03309

43. Apparatus according to claim 1, comprising at least one support adapted to lock said frame relative to at least one of said soft tissue and said hard tissue.
- 5 44. Apparatus according to claim 1, comprising a drill guide.
45. Apparatus according to claim 44, wherein said drill guide is adapted to guide a standard dental drill bit.
- 10 46. Apparatus according to claim 45, wherein said drill guide is adapted to limit a depth of penetration of said drill bit.
47. Apparatus according to claim 44, wherein said drill guide is locked to said frame.
- 15 48. Apparatus according to claim 47, wherein said drill guide is adjustable in at least two degrees of freedom of position and orientation prior to being locked to said frame.
49. Apparatus according to claim 47, wherein said drill guide is adjustable in at least three degrees of freedom of position and orientation prior to being locked to said frame.
- 20 50. Apparatus according to claim 48, comprising at least one encoder adapted to measure at least one of said degrees of freedom.
51. Apparatus according to claim 45, wherein said drill guide comprises at least one penetration limitation sleeve having a selectable offset from said frame.
- 25 52. Apparatus according to claim 51, wherein said at least one penetration limitation sleeve comprises a plurality of sleeves each having a different offset.
- 30 53. Apparatus according to claim 1, wherein said at least one encoder comprises a data output.
54. Apparatus according to claim 53, wherein said data output is wireless.

368/03309

55. Apparatus according to claim 53, comprising a three-dimensional display system to which said data output is attached, which display system is adapted to display an indication of said surface.
56. Apparatus according to claim 55, wherein said display system overlays said surface on a three dimensional representation of said hard tissue.
57. Apparatus according to claim 55, and including a controller configured to register said surface to said representation.
58. Apparatus according to claim 55, wherein said display system generates alerts responsive to an undesirable spatial position of a tool relative to said surface.
59. Apparatus according to claim 55, wherein said display system generates an indication of at least one of a position and orientation of a drill guide mounted on said frame.
60. Apparatus according to claim 59, wherein said indication comprises indication of a projected drill bore.
61. Apparatus according to claim 53, comprising a computerized manufacturing system to which said data output is attached, for manufacture of a drill guide for said hard tissue.
62. Apparatus according to claim 1, comprising a plurality of elements having tips adapted to not penetrate soft tissue.
63. A method of measuring the surface of a hard tissue underlying a soft tissue, comprising:
- (a) inserting a plurality of different sharp elements through said soft tissue to a surface of said hard tissue;
  - (b) determining at least relative positions of tips of said sharp elements; and
  - (c) reconstructing a map of said surface of said hard tissue from said at least relative positions.

368/03309

64. A method according to claim 63, comprising using said map to guide a drill to said hard tissue.
- 5 65. A method according to claim 64, comprising providing a drill guide for using said map.
66. A method according to claim 65, wherein said hard tissue comprises a jaw bone and wherein said soft tissue comprises hard tissue.
- 10 67. A method according to claim 65, comprising selecting an offset sleeve for controlling a depth of said drilling.
68. A method according to claim 65, comprising adjusting said drill guide according to said map.
- 15 69. A method according to claim 65, wherein said elements are mounted on two opposing panels of a frame and comprising approximating said panels.
70. A method according to claim 65, comprising registering said map to a previously  
20 acquired radiological image of said hard tissue,
71. A method according to claim 65, comprising providing real-time feedback on at least one of a position and orientation of said drill guide.
- 25 72. A method according to claim 63, wherein inserting comprises inserting using a standard dental pneumatic source.
73. A method according to claim 63, comprising removing said elements using a standard dental pneumatic source.
- 30 74. A method according to claim 63, comprising removing said elements from said soft tissue prior to said determining.

368/03309

75. A method according to claim 63, comprising removing said elements from said soft tissue after said determining.
76. A method according to claim 63, comprising locking said elements prior to said  
5 determining.
77. A method according to claim 63, comprising not locking said elements prior to said determining.
- 10 78. A dental surgical stent, comprising:  
(a) an active stent portion adapted to fit over a portion of a jaw bone; and  
(b) at least one visual indicator showing an activation state of said stent.
79. A dental surgical stent, comprising:  
15 (a) a surgical stent portion adapted for mounting on a jaw; and  
(b) a drill guide including at least one encoder which generates a signal indicative of at least one of a position and orientation of the drill guide.
80. A stent according to claim 79, wherein said surgical stent is machined for a particular  
20 jaw.
81. A stent according to claim 79, wherein said surgical stent comprises at least one mounting point for said drill guide.

368/03309

**ABSTRACT**

Apparatus for measuring a surface geometry of hard tissue covered by a layer of soft tissue, including a plurality of elements each having a tip adapted to penetrate said soft tissue and not substantially penetrate said hard tissue; a frame supporting movement of said elements, each along a path, such that a plurality of said tips, when positioned along the paths, define a surface; and at least one position sensor which generates a signal indicative of a tip position of at least one of said elements.

Express Mail Label No.

Page 1 of 3

Docket No.  
368/03309

## Declaration and Power of Attorney For Patent Application

### English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**HARD TISSUE SURFACE GEOMETRY DETERMINATION**

the specification of which

(check one)

- ☒ Is attached hereto.
- ☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

_____	_____
(Application Serial No.)	(Filing Date)
_____	_____
(Application Serial No.)	(Filing Date)
_____	_____
(Application Serial No.)	(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 385(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status)
		(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Paul Fenster, Reg. No. 33,877

Maier Fenster, Reg. No. 41,016

Phillip A. Weiss, Reg. No. 19,863

Yaakov Schatz, Reg. No. 44,320

Allan C. Entis, Reg. No. P 52,866

Michael J. Gerver, Reg. No. P 52,940

William H. Dippert, Reg. No. 26,723

Lloyd McAnlay, Reg. No. 20,423

Jules E. Goldberg, Reg. No. 24,408

Eugene LeDonne, Reg. No. 35,930

Stephen M. Chin, Reg. No. 39,938

Daniel P. Lent, Reg. No. 44,867

Gerald H. Kiel, Reg. No. 25,116

Arthur Dresner, Reg. No. 24,403

Samir R. Patel, Reg. No. 44,998

Harry H. Ahn, Reg. No. 40,243

Send Correspondence to: William H. Dippert, Esq.  
Reed Smith LLP  
599 Lexington Avenue, 29th Floor  
New York, NY 10022-7650

Direct Telephone Calls to: *(name and telephone number)*  
William H. Dippert (212) 521-5400

Full name of sole or first inventor Uriel WEINSTEIN	
Sole or first inventor's signature	Date
Residence 31 Tarmag Street, Mazkeret-Batya 76804, Israel	
Citizenship Israel	
Post Office Address 31 Tarmag Street, Mazkeret-Batya 76804, Israel	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

Oriel WEINSTEIN  
Docket No. 368/03309

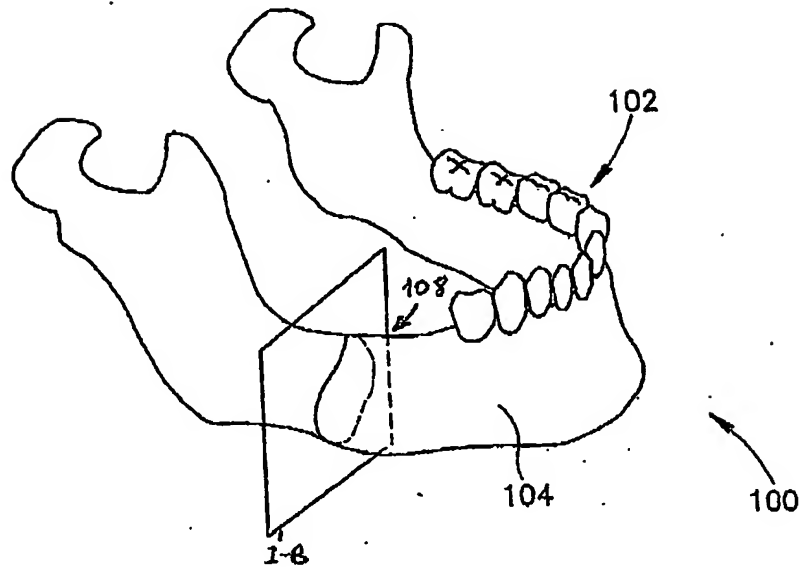


FIG. 1A

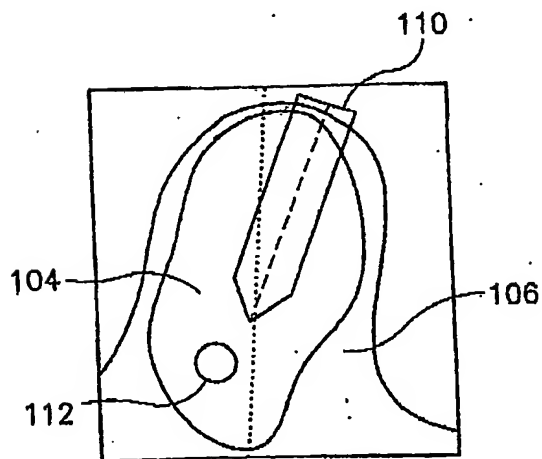


FIG. 1B

Uriel WEINSTEIN  
Docket No. 868/08309

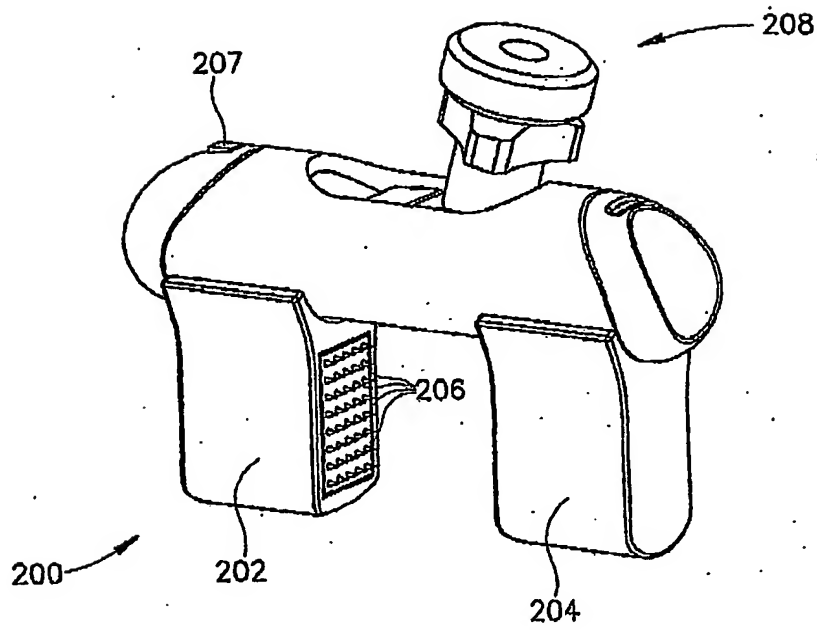


FIG. 2

UHEL WEINSTEIN  
Docket No. 368/03309

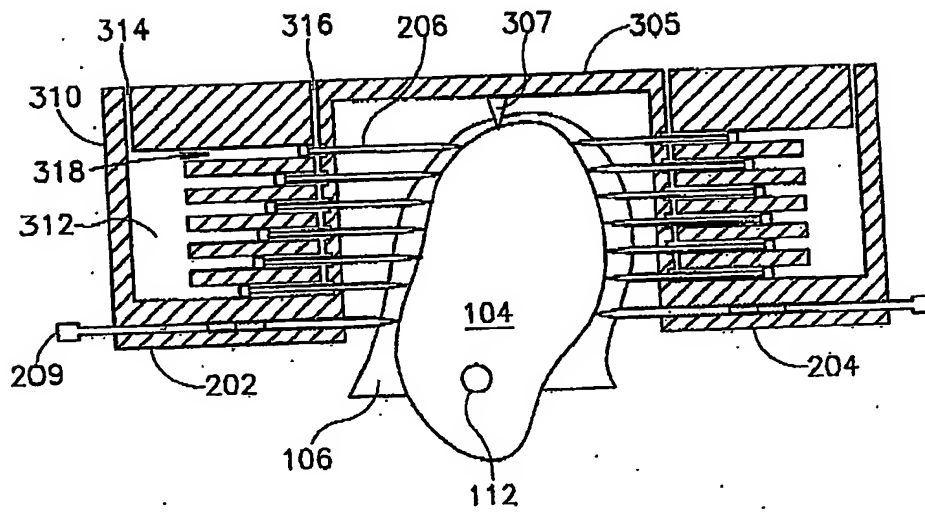


FIG.3

Uriel WEINSTEIN  
Docket No. 368/03309

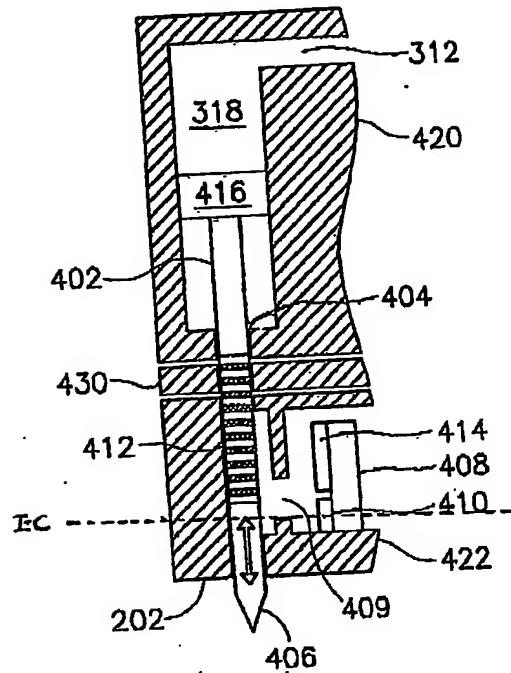


FIG. 4A

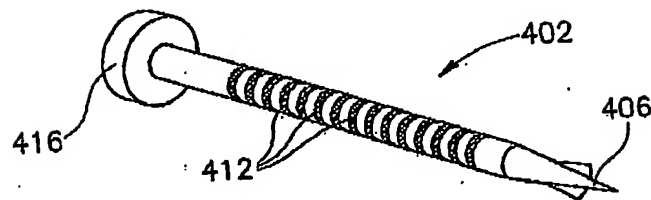


FIG. 4B

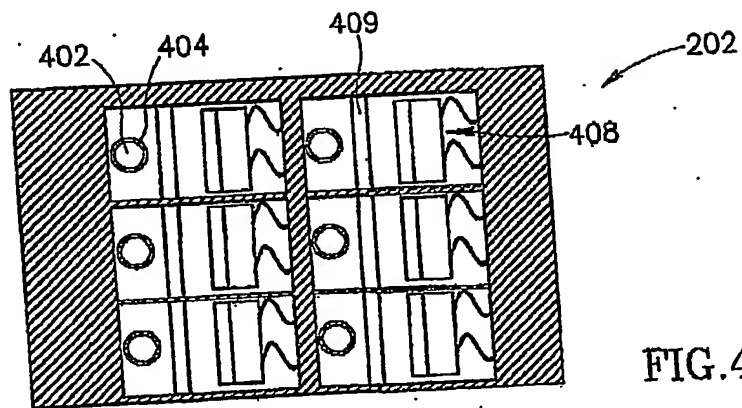


FIG. 4C

Uriel WEINSTEIN  
Docket No. 368/03309

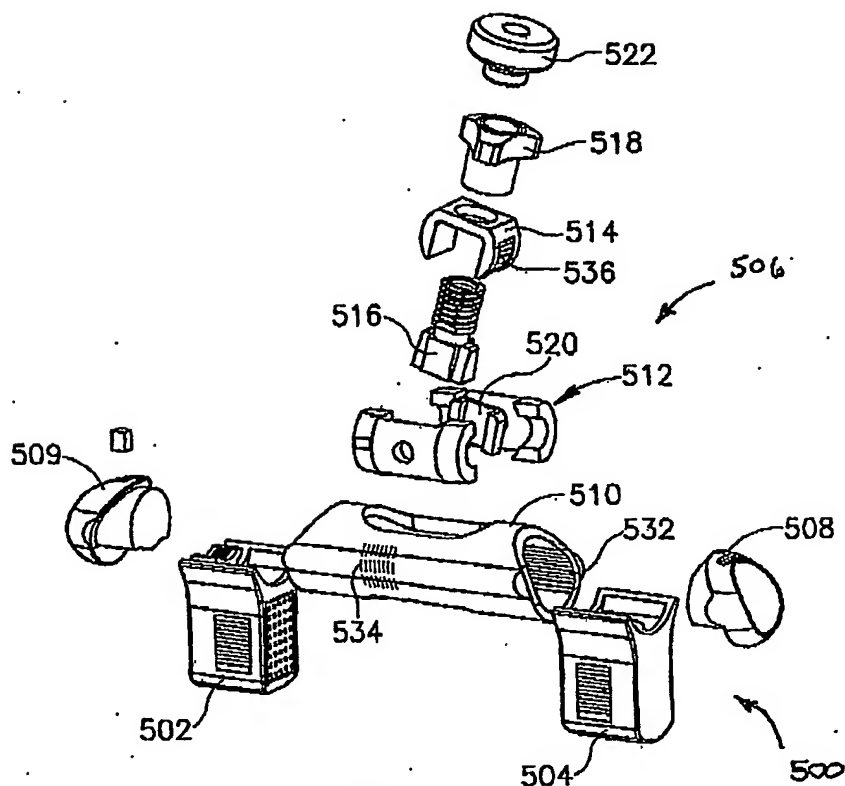


FIG. 5A

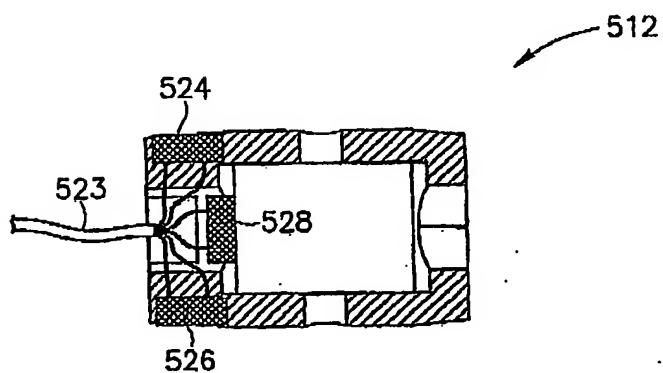


FIG. 5B

Uriel WEINSTEIN  
Docket No. 368/02309

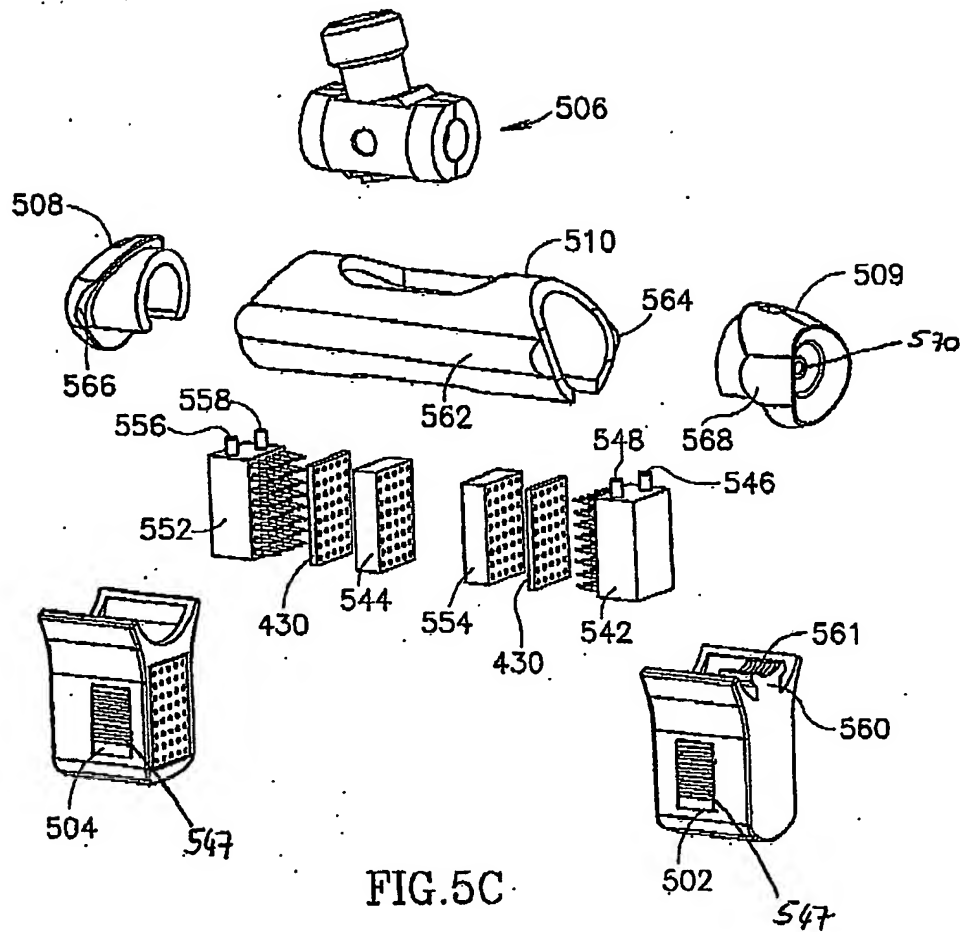


FIG. 5C

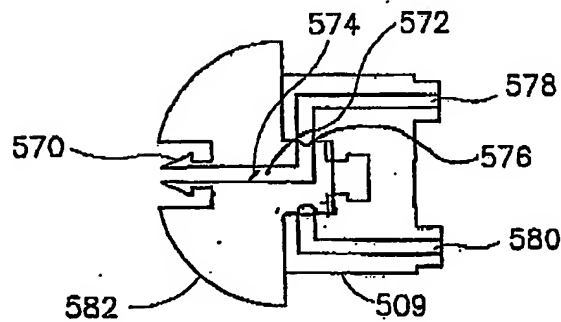


FIG. 5D

Oriel WEINSTEIN  
Docket No. 368/03209

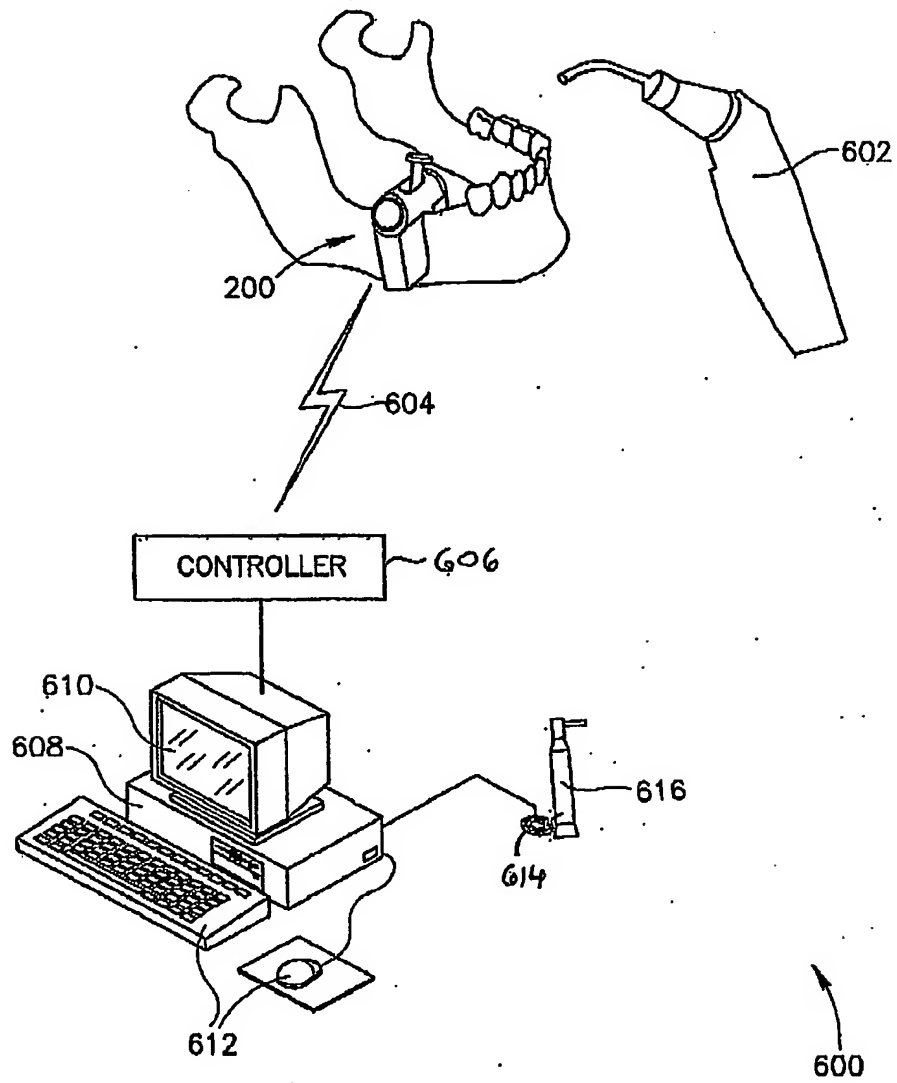


FIG. 6

Ux2l WEINSTEIN  
Docket No. 368/03309

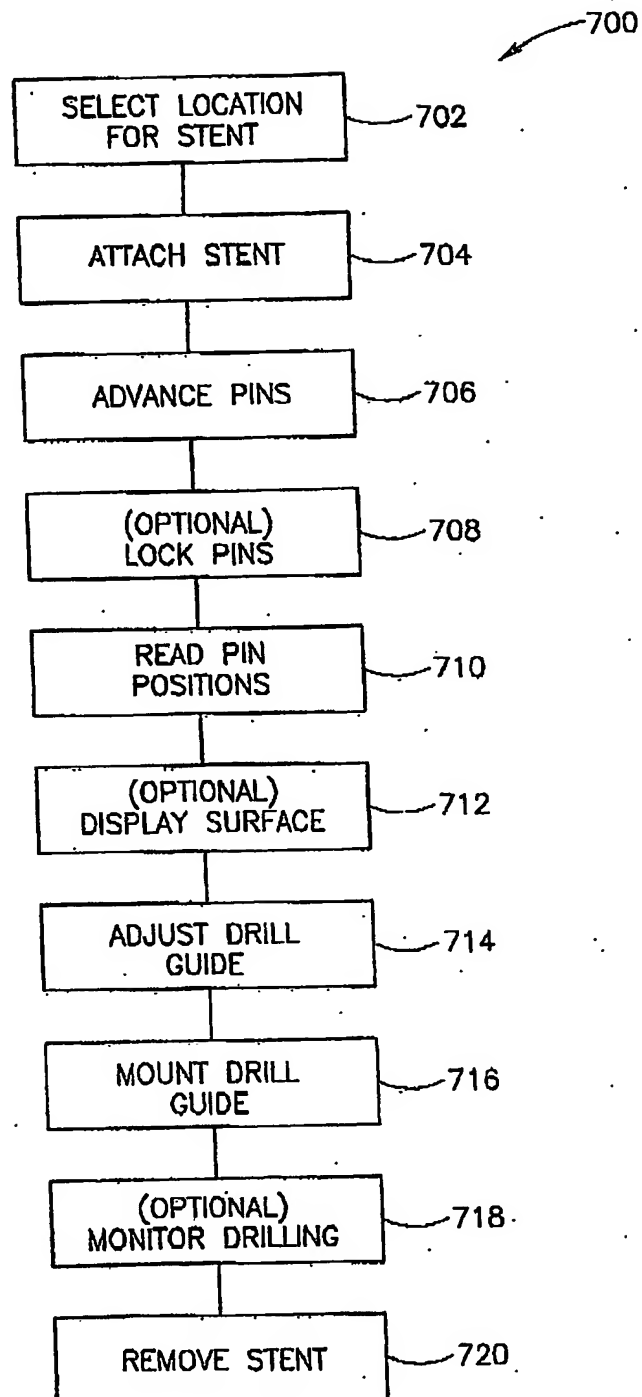


FIG. 7A

Uriel WEINSTEIN  
Docket No. 368/03309

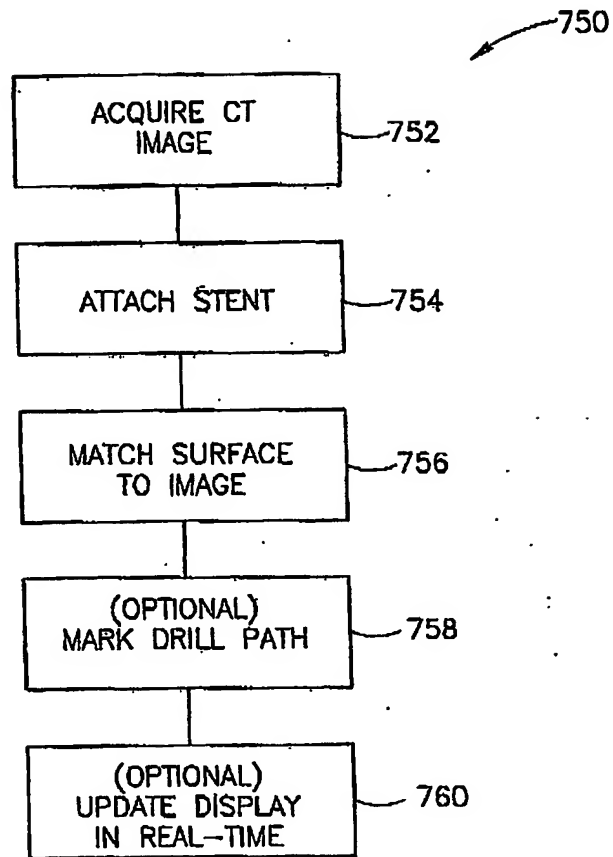


FIG. 7B

Uriel WEINSTEIN  
Docket No. 368/03209

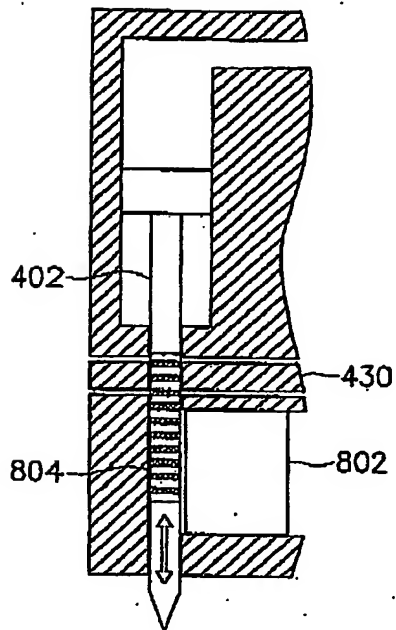


FIG. 8A

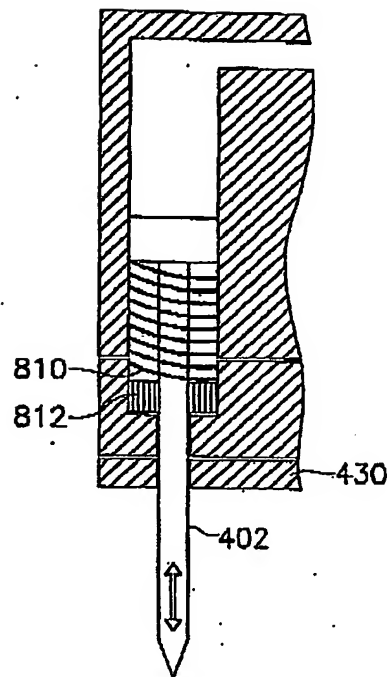


FIG. 8B

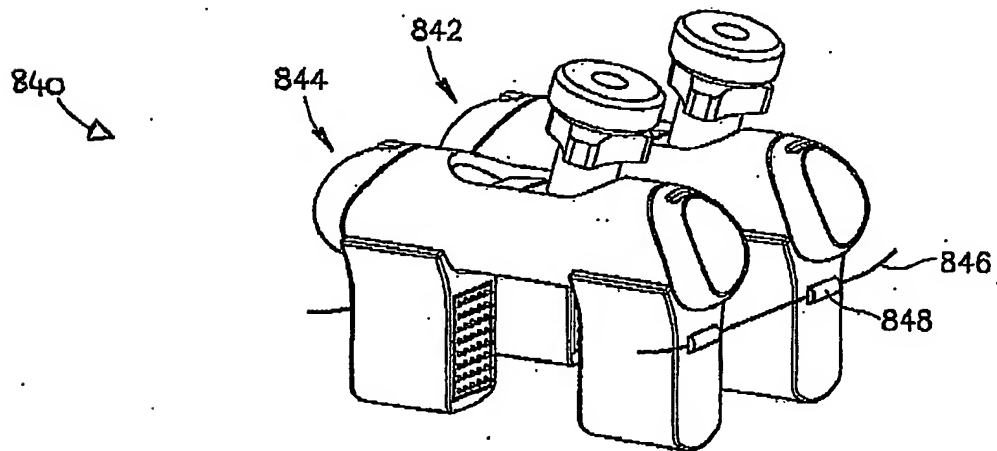


FIG. 8C

Uriel WEINSTEIN  
Docket No. 368/03309

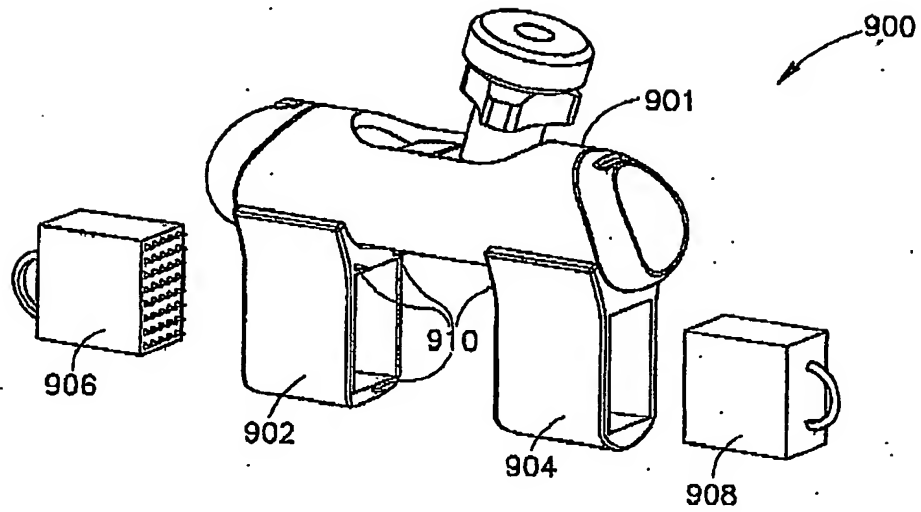


FIG. 9

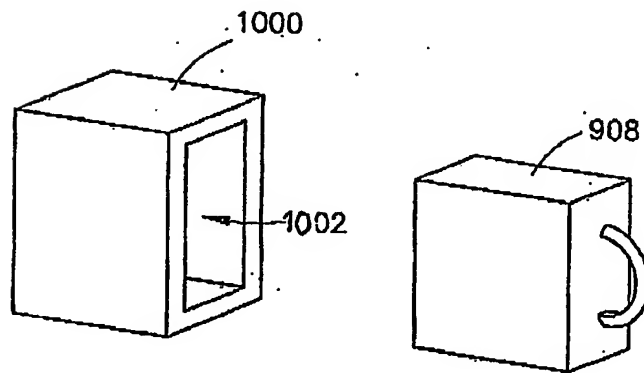


FIG. 10